




Agilent N9342C Handheld Spectrum Analyzer (HSA)

100 kHz to 7 GHz (tunable to 9 kHz)

Data Sheet

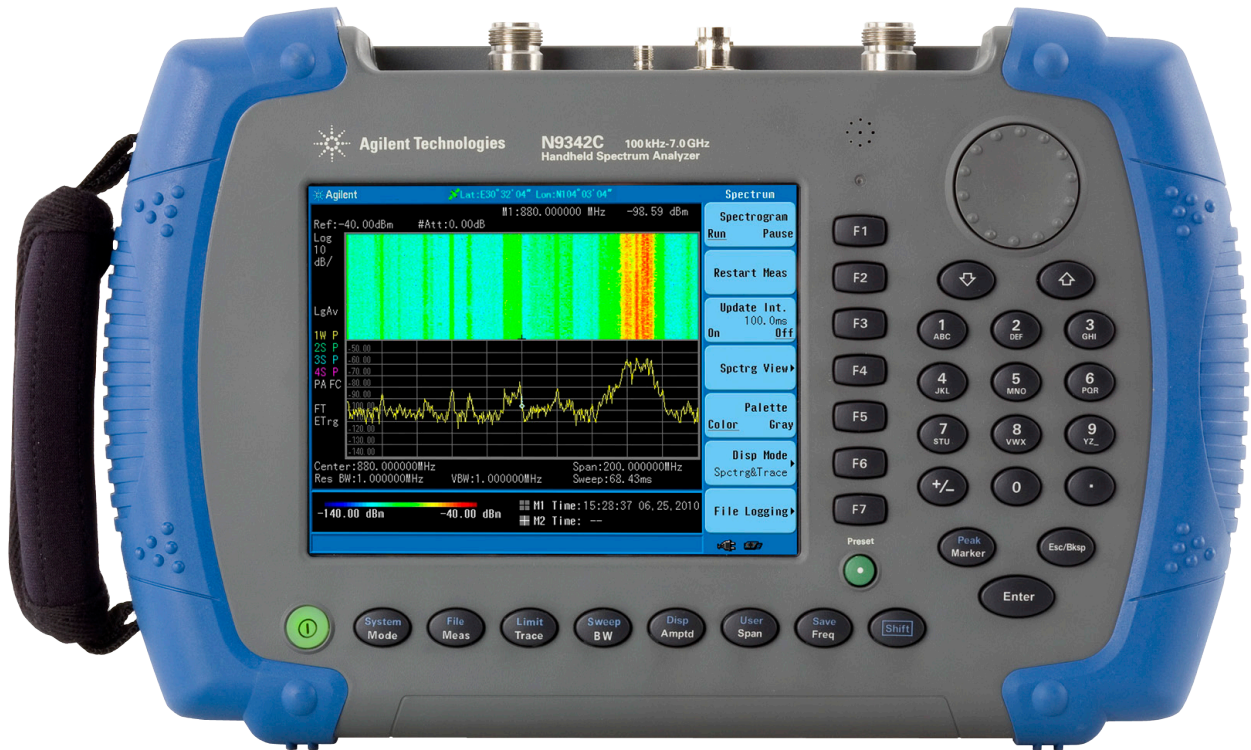

Field testing just got easier
www.agilent.com/find/hsa

If you are making measurements in the field, the Agilent N9342C handheld spectrum analyzer (HSA) makes your job easier. It's got the features you need for operating in tough field environments, and its measurement performance gives you confidence the job's been done right. The N9342C HSA let you automate routine tasks to save time and ensure consistent results. Field testing just got easier with the Agilent N9342C HSA.



Agilent Technologies

Your job just got easier:

- Get the features you need in a **field-ready** instrument.
- Gain confidence in your measurements with **benchtop** performance in a handheld instrument.
- Innovative **task planner** (www.agilent.com/find/taskplanner) reduces test setup time by 95%, delivers test automation and consistency, and makes it easy to capture test results, generate reports and share task plans with others.

Definitions and requirements

This data sheet contains specifications and supplemental information for Agilent N9342C handheld spectrum analyzer. The differences between specifications, typical performance, and nominal values are described as follows.

Definitions

Specifications describe the performance of parameters covered by the product warranty and apply to temperature ranges -10 °C to 50 °C, unless otherwise noted.

95th percentile values indicate the breadth of the population (> 2) of performance tolerances expected to be met in 95% of the cases with a 95% confidence, for any ambient temperature in the range of 20 °C to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specification that 80% of the units exhibit with a 95% confidence level over the temperature range 20 °C to 30 °C. Typical performance does not include measurement uncertainty.

Nominal values indicate expected performance, or describe product performance that is useful in the application of the product, but is not covered by the product warranty.

Conditions required to meet specifications

The following conditions must be met for the analyzer to meet its specifications.

- The analyzer is within its calibration cycle.
- Under auto couple control, except when Swp Time Rule is set to Accuracy.
- Any analyzer that has been stored at a temperature range inside the allowed storage range but outside the allowed operating range must be stored at an ambient temperature within the allowed operating range for at least two hours before being turned on.
- The analyzer has been turned on at least 30 minutes.

Certification

Agilent Technologies certifies that this product met its published specifications at the time of shipment from the factory. Agilent Technologies further certifies that its calibration measurements are traceable to the United States National Institute of Standards and Technology (NIST), to the extent allowed by the Institute's calibration facility, and to the calibration facilities of other International Standards Organization (ISO) members.



Specifications

Specification		Supplemental information	
Frequency			
Frequency range	100 kHz to 7 GHz (tunable to 9 kHz)	AC coupled	
Internal 10 MHz frequency reference accuracy			
Aging rate	± 1 ppm/year		
Temperature stability	± 1 ppm	Referenced to frequency reading at 25 °C. Temperature varied at max. of 2 °C per minute. Control voltage held at voltage control range midpoint.	
Frequency readout accuracy with marker (start, stop, center, marker)			
Marker resolution	(frequency span)/(sweep points -1)		
Uncertainty	± (frequency indication × frequency reference uncertainty +1% × span +20% × resolution bandwidth + marker resolution +1 Hz)	Frequency reference uncertainty = (aging rate × period of time since adjustment + temperature stability)	
Marker frequency counter			
Resolution	1 Hz		
Accuracy	± (marker frequency × frequency reference uncertainty + counter resolution)	RBW/span ≥ 0.02; marker level to displayed noise level > 25 dB; frequency offset 0 Hz	
Frequency span			
Range	0 Hz (zero span), 100 Hz to 7 GHz		
Resolution	1 Hz		
Accuracy	± (0.22% × span + span/(sweep points -1))	Nominal	
SSB phase noise			
Carrier offset	30 kHz	< -86 dBc/Hz, typical -89 dBc/Hz	20 °C to 30 °C
	100 kHz	< -97 dBc/Hz, typical -99 dBc/Hz	Center frequency 500 MHz
	1 MHz	< -115 dBc/Hz, typical -119 dBc/Hz	
Resolution bandwidth (RBW)			
-3 dB bandwidth	10 Hz to 3 MHz	1-3-10 sequence	
Accuracy	± 5%, RBW = 10 Hz to 1 MHz	Nominal	
	± 10%, RBW = 3 MHz		
Resolution filter shape factor	< 5 : 1	Nominal; 3 dB bandwidth ratio; digital, Gaussian-like	
Video bandwidth (VBW)			
-3 dB bandwidth	1 Hz to 3 MHz	1-3-10 sequence	
Accuracy	± 10%, VBW = 1 Hz to 1 MHz	Nominal	

Specifications (continued)

Amplitude specifications		Supplemental information	
Measurement range			
100 kHz to 2 MHz	Displayed average noise level (DANL) to +10 dBm	Preamp off	
2 MHz to 7 GHz	Displayed average noise level (DANL) to +20 dBm		
Input attenuator range	0 dB to 50 dB, in 1 dB steps		
Maximum safe input level			
Average continuous power	+33 dBm, 3 minutes maximum	Input attenuator setting \geq 20 dB, 2 MHz to 7 GHz	
DC voltage	\pm 50 VDC maximum		
Displayed average noise level ¹			
Preamp off			
100 kHz to 1 MHz	-108 dBm, typical -127 dBm	Reference level \leq -50 dBm	
1 MHz to 10 MHz	-128 dBm, typical -146 dBm		
10 MHz to 500 MHz	-142 dBm, typical -146 dBm		
500 MHz to 2.5 GHz	-141 dBm, typical -145 dBm		
2.5 GHz to 4 GHz	-140 dBm, typical -144 dBm		
4 GHz to 6 GHz	-138 dBm, typical -142 dBm		
6 GHz to 7 GHz	-136 dBm, typical -140 dBm		
Preamp on			
100 kHz to 1 MHz	-131 dBm, typical -150 dBm	Reference level \leq -70 dBm	
1 MHz to 10 MHz	-148 dBm, typical -163 dBm		
10 MHz to 500 MHz	-161 dBm, typical -164 dBm		
500 MHz to 2.5 GHz	-159 dBm, typical -162 dBm		
2.5 GHz to 4 GHz	-158 dBm, typical -161 dBm		
4 GHz to 6 GHz	-155 dBm, typical -158 dBm		
6 GHz to 7 GHz	-150 dBm, typical -154 dBm		
Level display range			
Log scale	10 dB to 100 dB, 10 divisions displayed, 1, 2, 5, 10 dB/division		
Linear scale	0% to 100%, 10 divisions displayed		
Scale units	dBm, dBmV, dB μ V, W, V, dBmV EMF, dB μ V EMF, V EMF		
Sweep (trace) points	461		
Marker level readout resolution	Log scale	0.01 dB	
	Linear scale	\leq 1% of signal level	Nominal
Detectors	Normal, positive peak, sample, negative peak, average (video, RMS, voltage)		
Number of traces	4		

1. RMS detector, trace averaging > 40, 0 dB input attenuation, input terminated 50 Ω , 1 kHz resolution bandwidth, normalized to 1 Hz, 20 °C to 30 °C.

Specifications (continued)

Amplitude specifications (continued)		Supplemental information
Level display range (continued)		
Trace functions	Clear/write, maximum hold, minimum hold, average	
Level measurement error	Excluding input VSWR mismatch ± 1.5 dB, typical ± 0.6 dB	<ul style="list-style-type: none"> • 20 °C to 30 °C, peak detector, preamp off, input signal -50 dBm to 0 dBm, 95% percentile. • Swp Time Rule is set to Accuracy. • Adds additional ± 0.3 dB when Swp Time Rule is set to Speed.
Reference level ²		
Setting range	-100 dBm to +30 dBm	Steps of 1 dB
Setting resolution	Log scale	0.01 dB
	Linear scale	Same as log (2.236 μ V to 7.07 V)
Accuracy	0	
RF Input VSWR (at tuned frequency)		
10 MHz to 3 GHz	< 1.5 : 1	Nominal, 10 dB or 20 dB attenuation
3 GHz to 7 GHz	< 2.0 : 1	
Spurious response		
Second harmonic distortion	< -65 dBc, 50 MHz to 3 GHz	Mixer signal level at -30 dBm, input attenuation 0 dB, preamp off, 20 °C to 30 °C.
	< -70 dBc, 3 GHz to 7 GHz	
Third order intermodulation distortion (third order intercept)	+7 dBm, 50 MHz to 300 MHz	Two -20 dBm tones at input mixer, spaced by 100 kHz, input attenuation 0 dB, preamp off, reference level ≥ -30 dBm, 20 °C to 30 °C.
	+10 dBm, 300 MHz to 7 GHz	
Input related spurious	< -75 dBc	<ul style="list-style-type: none"> • -30 dBm signal at input mixer, span limit < 2.9 GHz • Exception: -55 dBc (2 x F1 = Center Frequency - 5890 MHz, 7 GHz < Center Frequency < 10 GHz, with F1 input frequency)
Inherent residual response	< -90 dBm, typical -98 dBm	Input terminated and 0 dB RF attenuation, preamplifier off.

2. Reference level only affects the display not the measurement, so trace data markers do not cause additional errors in measurement results.

Specifications (continued)

Sweep specifications		Supplemental information
Sweep time		
Range	2 ms to 1000 s	Span \geq 100 Hz
	600 ns to 200 s	Span = 0 Hz (zero span)
Sweep mode	Continuous, single	
Sweep time rule	Accuracy, speed	
Trigger source	Free run, video, external, RF burst	
Trigger slope	Selectable positive or negative edge	
Trigger delay	± 12 ms to ± 12 s	Nominal, span = 0 Hz (zero span)
Front panel input/output		Supplemental information
RF input		
Connector and impedance	Type-N female, 50 Ω	Nominal
10 MHz reference/external trigger input		
Reference input frequency	10 MHz	
Reference input amplitude	0 dBm to +10 dBm	
Trigger voltage	5 V TTL level	Nominal
Connector	BNC female, 50 Ω	Nominal
Probe power		
Voltage/current	+15 Vdc, $\pm 7\%$ at 0 mA to 150 mA (nominal)	
	-12.6 Vdc, $\pm 10\%$ at 0 mA to 150 mA (nominal)	
	GND	
USB interface		
Host connector	USB Type-A female	
	Compatible with USB 2.0 full speed	
Device connector	USB Type-mini AB female	
	Compatible with USB 2.0 full speed	
General specifications		Supplemental information
Display		
Resolution	640 pixels x 480 pixels	
Size and type	6.5 inch (170 mm) TFT color display	
Languages		
On-screen GUI	English, Simplified Chinese, Traditional Chinese, French, German, Italian, Japanese, Korean, Russian, Spanish, Portuguese	
Power requirements and calibration		
Adaptor voltage	100 V to 240 V AC, 50 Hz to 60 Hz	Auto-ranging
	15 V DC, 5.3 A, 80 W max	
Power consumption	15 W	Typical
Battery operating time (fully charged battery)	4 hours	Tracking generator off, preamplifier on
	3 hours	Tracking generator on, preamplifier on
Charging time	3 hours	
Life time	300 to 500 charge cycles	
Warm-up time	30 minutes	
Calibration cycle	One year	

Specifications (continued)

General specifications (continued)		Supplemental information
Environmental and size		
Temperature range	-10 °C to +50 °C	Operating (Battery: 0 °C to 50 °C)
	-40 °C to +70 °C	Storage (Battery: -20 °C to 50 °C)
Relative humidity	< 95%	
Weight	3.2 kg (7 lbs)	Net (shipping) approximately, 3.6 kg (7.9 lbs) with battery
Dimensions	318 mm × 207 mm × 69 mm (12.5 in x 8.15 in x 2.7 in)	Approximately (W x H x D)
Option specifications		Supplemental information
Spectrum monitor (Option SIM)		
Display modes	Spectrogram	
	Spectrum trace	
	Combination of spectrogram and spectrum trace in one screen	
RF preamplifier (Option PA7)		
Frequency range	100 kHz to 7 GHz	
Gain	25 dB	Nominal
Tracking generator (Option TG7)		
Frequency range	5 MHz to 7 GHz	
Output level	0 dBm to -20 dBm	1 dB steps
VSWR	< 2.0 : 1	Nominal
Connector and impedance	Type-N female, 50 Ω	
AM/FM modulation analysis (Option AMA)		
Frequency range	10 MHz to 7 GHz	
Carrier power accuracy	±1.8 dB	Nominal
Carrier power range	-30 dBm to +10 dBm	100 kHz to 2 MHz
	-30 dBm to +20 dBm	2 MHz to 7 GHz
Carrier power displayed resolution	0.01 dBm	
AM measurement		
Modulation rate	20 Hz to 100 kHz	
Accuracy	1 Hz	Nominal (modulation rate < 1 kHz)
	< 0.1% modulation rate	Nominal (modulation rate > 1 kHz)
Depth	5% to 95%	
Accuracy	± 4%	Nominal
FM measurement		
Modulation rate	20 Hz to 200 kHz	
Accuracy	1 Hz	Nominal (modulation rate < 1 kHz)
	< 0.1% modulation rate	Nominal (modulation rate > 1 kHz)
Depth	20 Hz to 400 kHz	
Accuracy	± 4%	Nominal

Specifications (continued)

Option specifications (continued)		Supplemental information
Time-gated spectrum analysis (Option TMG)		
Gated sweep		
Span range	Any span	
RBW range	> = 1 kHz	VBW is fixed and equal to RBW ³
Gate delay range	200 ns to 10.0 s	200 ns resolution
Gate length range	200 ns to 10.0 s	200 ns resolution, 12 us minimum
Gate sources	External	
	Periodic Timer	<ul style="list-style-type: none"> • Sync sources include free and external. • Period: 0 s to 20.0 s <i>(It should be greater than Gate Delay plus Gate Length.)</i> • Offset: -5 to +5 s

3. For efficiency and convenience, RBW is restricted to be equal to or greater than 1 kHz and VBW is restricted to be equal to RBW.



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.

Agilent Channel Partners

www.agilent.com/find/channelpartners

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. We share measurement and service expertise to help you create the products that change our world. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair, reduce your cost of ownership, and move us ahead of your development curve.

www.agilent.com/find/advantageservices



www.agilent.com/quality

www.agilent.com
www.agilent.com/find/N9342C

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3500
Mexico	01800 5064 800
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 9276201

For other unlisted Countries:

www.agilent.com/find/contactus

Revised: October 14, 2010

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2011
Printed in USA, February 24, 2011
5990-5587EN



Agilent Technologies